



PACKAGED AIR CONDITIONERS NX SERIES 2023/2024

www.bbair.co.th

Panasonic

**Building Passion,
Building Solutions.**
Panasonic Air Conditioning Systems

We face a time in which "quality air" differentiates business. It's a time for Panasonic to fully display its strengths. Our ability to assemble and build superior systems isn't just due to the rich resources we have as a comprehensive electronics manufacturer, but also to Panasonic's 100 years of tradition, where each person thinks and acts on their own initiative while working in a team to reach further heights. We do not compromise. Each of our independent selves is a one stop solution. We face our customers' challenges together with our customers and do all that we can to build effective systems. As a true partner for our customers, we strive to always be at the forefront of business.

- Please read the Installation Instructions carefully before installing the unit, and the Operating Instructions before using it.
- Specifications are subject to change without prior notice.
- The contents of this catalogue are accurate as of August 31, 2023.
- Due to printing considerations, the actual colours may vary slightly from those shown.
- All graphics are provided merely for the purpose of illustrating a point.



Do not add or replace refrigerant other than the specified type. Manufacturer is not responsible for the damage and deterioration in safety due to usage of other refrigerant.

Authorised Dealer

PAC INVERTER ASIA Sep 2023



nanoeX

INVERTER



Panasonic A. P. Sales (Thailand) Co., Ltd.

18/6 Moo7, Bangna-Trad Road Km. 17,
Bangchalong, Bangplee, Samutprakarn 10540
Tel: 02-312-7148



QUALITY AIR FOR LIFE

NX Series Product Lineup




- All indoor units are equipped with nanoe™ X technology (Mark 2) as standard
- DELUXE 4-Way Cassette, equipped with nanoe™ X technology (Mark 3)

*3-phase model newly added.

Capacity [Btu/h]		18,100	24,000	30,000	36,200	42,000	48,100
4-Way Cassette	Indoor units Generator Mark3	S-18PU3TA	S-24PU3TA	S-30PU3TA	S-3648PU3TA*		
	EGAT CLASS						
		—	—	—			
Adaptive Ducted	Indoor units Generator Mark2	S-18PF3T	S-24PF3T	S-30PF3T	S-3648PF3T*		
	EGAT CLASS						
		—	—	—			
Ceiling Exposed	Indoor units Generator Mark2	S-18PT3T	S-24PT3T	S-30PT3T	S-3648PT3T*		
	EGAT CLASS						
		—	—	—			
Outdoor Units	 	U-18PRH1T5	U-24PRH1T5	U-30PRH1T5	U-36PRH1T5	U-42PRH1T5	U-48PRH1T5
		—	—	—	U-36PRH1T8*	U-42PRH1T8*	U-48PRH1T8*

nanoe™ X Bringing Nature's Balance Indoors

Abundant in nature, hydroxyl radicals (also known as OH radicals) inhibit pollutants, viruses and bacteria to clean and deodorise. nanoe™ X technology can bring these incredible benefits indoors.



7 Effects of nanoe™ X : Creating Cleaner Environments

nanoe™ inhibits 5 types of pollutants, deodorises and moisturises thanks to the action of hydroxyl radicals contained in water.



The evidence page of nanoe™ X effect


Flexible Installation Adaptive Ducted

NX Series Adaptive Ducted units can be mounted not only horizontally but also vertically without the need for alterations.

Our groundbreaking drain pan design delivers flexibility in an industry-leading vertical installation.



Product information

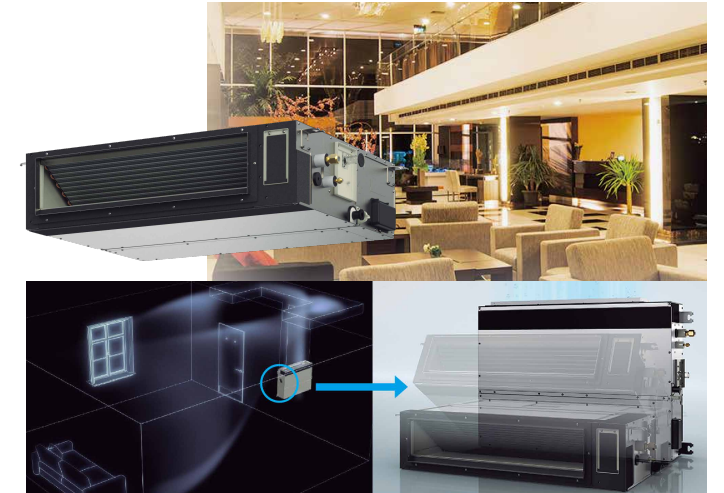

Compact Body with Powerful 150 Pa ESP

Indoor units have also been redesigned and are now just 250 mm in height and lighter in weight, yet still deliver the same powerful 150 Pa.

Space saving 250 mm height

NX Series
Height **250 mm** Weight* 25 kg
Note: In the case of 2HP




Higher nanoe™ X Concentration, Even in Large Spaces

www.bbair.co.th

nanoe™ X Generator Mark 3 providing a 100-fold increase in hydroxyl radical generation*. Greater effectiveness even in large spaces of more than 100 m².

* Compared to original nanoe™.

nanoe™ X Concentration Simulation: Generator Mark 3 for Highest Concentration Levels.

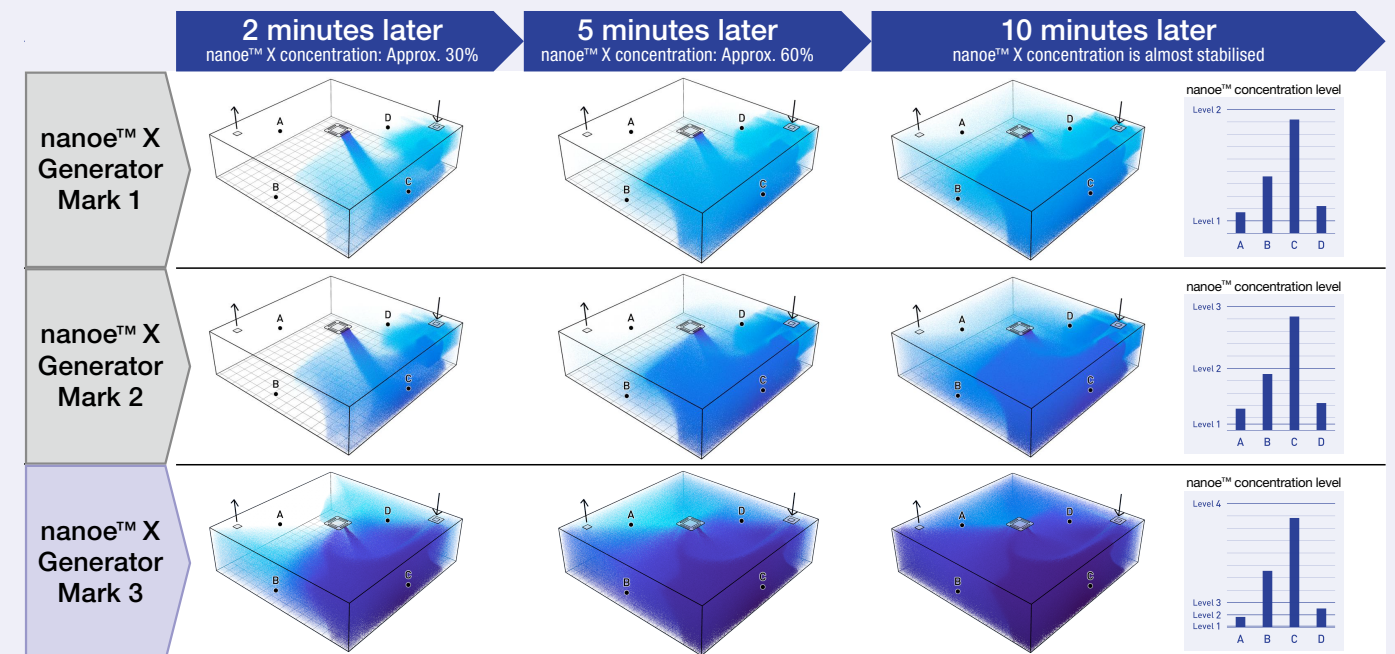

Conditions of the simulation : Verification space: 168 m³ / Room size: 70 m² / Room height: 2.4 m / Inspection model: 4-way cassette / Position of IDU: Centre

* There are 7 key benefits provided by nanoe which commence when concentration reaches level 1. The concentration level affects the speed at which the benefits occur. Concentration level 2 is 10 times the concentration of level 1, and concentration level 3 is 20 times the concentration of level 1. ** The results shown are for simulation purpose only and concentration may vary due to actual room conditions.


Advantages of 4-Way Cassette

Compact, modern & flat panel design




Powerful airflow

Thanks to its compact design the Twisted 3D Blade Fan increases airflow.

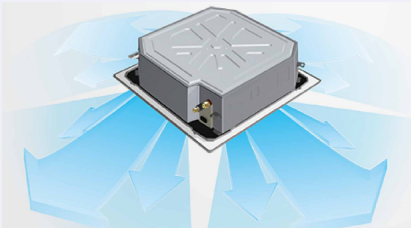

360° comfortable airflow

Air coming out of the centre of the discharge outlets travels farther. Air is discharged across a wide area from the four sides of the unit.

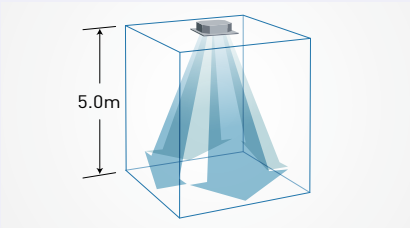


Wide flap

A wider main flap and sub flap reduce turbulence and increase airflow. Also, a wider angle jetting port allows airflow to reach as far as five metres.

* 4-Way Cassette : 3648PU type

Advantages of Outdoor Unit

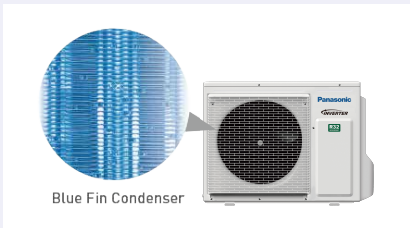

High durability outdoor unit

All Panasonic heat exchangers feature our Blue Fin technology, which offers enhanced corrosion resistance compared to non-Blue Fin models.



In-house manufactured compressor

Panasonic all in-house manufactured compressors are supplied to the world. The cumulative total of high-quality compressors in use has reached 580 million units*.


*As of September 2019. (In-house research)



Next generation R32 refrigerant


Compared to R22 and R410A, R32 has a very low potential impact on the depletion of the ozone layer and global warming.

Installation Instruction

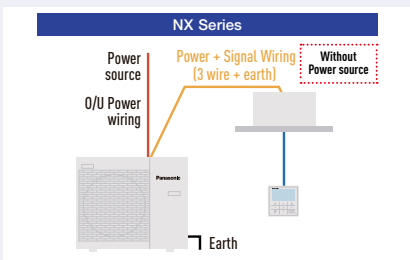


3 wire method

This NX series has been developed with 3 wire method and communication.

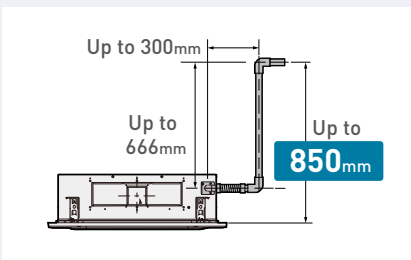

A strong and quiet drain pump

The drain pump can pump water up to a height of 850 mm, making drain pipe layout easy. Supports for 4-way Cassette.

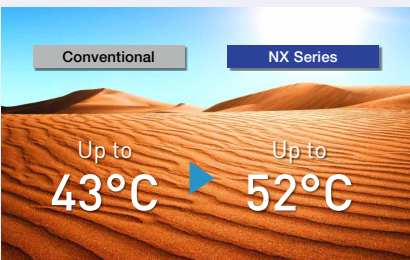


Operation temperature

NX series are capable of working even in the most difficult ambient conditions. Operating range expanded up to outdoor air temperature of 52°C.

4-WAY CASSETTE


- With the further advanced air purification technology of nanoe™ X Generator Mark 3.
- Powerful industry-leading, 360° wide, comfortable airflow.
- The drain pump can pump water up to a height of 850 mm, making drain pipe layout easy.

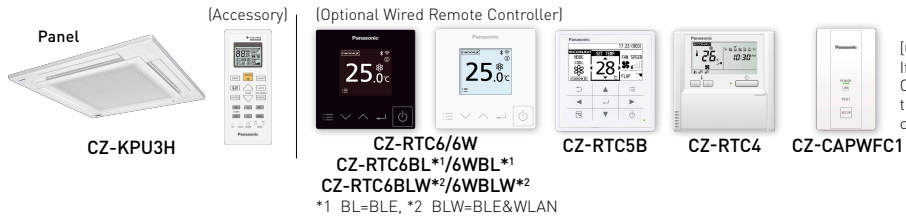

Capacity [Btu/h(Phase)]	18,100	24,000	30,000	36,200	36,200 (3)	42,000	42,000 (3)	48,100	48,100(3)
Power Source	V/Phase Hz	220V, 10Phase - 50Hz	220V, 10Phase - 50Hz	380V, 30Phase - 50Hz	380V, 30Phase - 50Hz	220V, 10Phase - 50Hz	380V, 30Phase - 50Hz	220V, 10Phase - 50Hz	380V, 30Phase - 50Hz
Indoor Unit		S-18PU3TA	S-24PU3TA	S-30PU3TA	S-3648PU3TA	S-3648PU3TA	S-3648PU3TA	S-3648PU3TA	S-3648PU3TA
Outdoor Unit		U-18PRH1T5	U-24PRH1T5	U-30PRH1T5	U-36PRH1T5	U-36PRH1T5	U-36PRH1T5	U-36PRH1T5	U-36PRH1T5
Panel		CZ-KPU3H	CZ-KPU3H	CZ-KPU3H	CZ-KPU3H	CZ-KPU3H	CZ-KPU3H	CZ-KPU3H	CZ-KPU3H
Cooling Capacity: Rated [Min-Max]	kW	5.30 (2.00-6.00)	7.00 (2.10-8.00)	8.80 (2.10-10.00)	10.60 (3.80-11.20)	10.60 (3.80-11.20)	12.30 (3.80-14.00)	12.30 (3.80-14.00)	14.10 (5.30-15.50)
	Btu/h	18,100 (6,820-20,500)	24,000 (7,170-27,300)	30,000 (7,170-34,100)	36,200 (13,000-38,200)	36,200 (13,000-38,200)	42,000 (13,000-47,800)	42,000 (13,000-47,800)	48,100 (18,100-52,900)
Current: Rated [Max]	A	5.2 (9.1)	7.8 (12.0)	10.8 (15.5)	13.4 (25.5)	13.4 (25.5)	17.5 (26.0)	17.5 (26.0)	22.7 (28.0)
Power Input: Rated [Min-Max]	kW	1.08 (0.26-1.35)	1.69 (0.28-2.25)	2.32 (0.29-2.70)	2.71 (0.62-3.00)	2.71 (0.62-3.00)	3.55 (0.63-4.10)	3.55 (0.63-4.10)	4.60 (0.96-5.10)
COP/EER	W/W	4.91	4.14	3.79	3.91	3.91	3.46	3.46	3.07
	Btu/hW	16.76	14.20	12.93	13.36	13.36	11.83	11.83	10.46
SEER	Btu/hW	26.27	23.03	22.52	21.80	22.43	20.60	21.00	19.30
Indoor Unit									
Air Volume	m³/min	25.0	25.0	34.5	34.5	34.5	36.4	36.4	36.4
	cfm	882	882	1,220	1,220	1,220	1,285	1,285	1,285
Sound Pressure Level [Hi/L0]	dB [A]	42 / 35	42 / 35	46 / 41	46 / 41	46 / 41	47 / 41	47 / 41	47 / 41
Sound Power Level [Hi/L0]	dB [A]	57 / 50	57 / 50	61 / 56	61 / 56	61 / 56	62 / 56	62 / 56	62 / 56
Dimension	Indoor (HxWxD)	mm	256 x 840 x 840	319 x 840 x 840	319 x 840 x 840	319 x 840 x 840	319 x 840 x 840	319 x 840 x 840	319 x 840 x 840
	Panel (HxWxD)	mm	44 x 950 x 950	44 x 950 x 950	44 x 950 x 950	44 x 950 x 950	44 x 950 x 950	44 x 950 x 950	44 x 950 x 950
Net Weight	Indoor	kg	21	21	24	24	24	24	24
	Panel	kg	5	5	5	5	5	5	5
Outdoor Unit									
Sound Pressure Level	dB [A]	50	53	53	54	54	57	57	58
Sound Power Level	dB [A]	69	72	72	73	73	76	76	77
Dimension	Outdoor (HxWxD)	mm	695 x 875 x 320	695 x 875 x 320	695 x 875 x 320	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370
Net Weight		kg	39	39	39	67	67	75	73
Piping Connection	Gas Pipe	mm (inch)	12.70 (1/2)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)
	Liquid Pipe	mm (inch)	6.35 (1/4)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)
Pipe Length	Min-Max	m	5-50	5-50	5-50	5-50	5-50	5-50	5-50
Elevation Difference	m	30	30	30	30	30	30	30	30
Maximum Chargeless Length Max	m	30	30	30	30	30	30	30	30
Additional Gas	g/m	15	25	25	25	25	25	25	25
Operation Range, Outdoor	Min-Max	°C	16-52	16-52	16-52	16-52	16-52	16-52	16-52

ADAPTIVE DUCTED

- Air intake from rear as standard. Industry-leading horizontal and vertical design.
- Powerful 150 Pa ESP and space saving 250 mm height, filter included.
- Built-in drain pump and selectable air inlet position (bottom and rear).

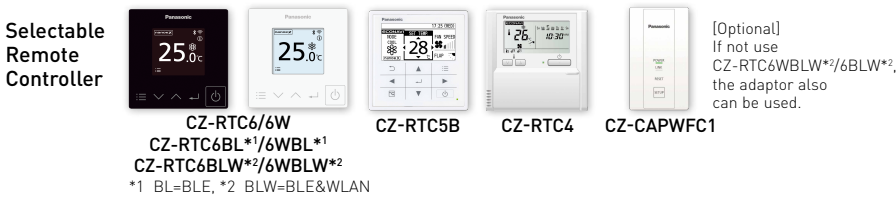

Capacity [Btu/h(Phase)]	18,100	24,000	30,000	36,200	36,200 (3)	42,000	42,000 (3)	48,100	48,100(3)
Power Source	V/Phase Hz	220V, 10Phase - 50Hz	220V, 10Phase - 50Hz	380V, 30Phase - 50Hz	380V, 30Phase - 50Hz	220V, 10Phase - 50Hz	380V, 30Phase - 50Hz	220V, 10Phase - 50Hz	380V, 30Phase - 50Hz
Indoor Unit		S-18PF3T	S-24PF3T	S-30PF3T	S-3648PF3T	S-3648PF3T	S-3648PF3T	S-3648PF3T	S-3648PF3T
Outdoor Unit		U-18PRH1T5	U-24PRH1T5	U-30PRH1T5	U-36PRH1T5	U-36PRH1T5	U-36PRH1T5	U-36PRH1T5	U-36PRH1T5
Cooling Capacity: Rated [Min-Max]	kW	5.30 (1.60-6.00)	7.00 (1.80-8.00)	8.80 (2.00-10.00)	10.60 (3.80-11.20)	10.60 (3.80-11.20)	12.30 (3.80-14.00)	12.30 (3.80-14.00)	14.10 (5.30-15.50)
	Btu/h	18,100 (5,460-20,500)	24,000 (6,140-27,300)	30,000 (6,820-34,100)	36,200 (13,000-38,200)	36,200 (13,000-38,200)	42,000 (13,000-47,800)	42,000 (13,000-47,800)	48,100 (18,100-52,900)
Current: Rated [Max]	A	6.5 (9.1)	8.6 (12.0)	11.1 (15.5)	13.6 (25.5)	13.6 (25.5)	18.3 (26.0)	18.3 (26.0)	22.7 (28.0)
Power Input: Rated [Min-Max]	kW	1.35 (0.24-1.55)	1.85 (0.30-2.35)	2.39 (0.26-3.00)	2.76 (0.65-3.08)	2.76 (0.65-3.08)	3.70 (0.65-4.35)	3.70 (0.65-4.35)	4.91 (0.96-5.45)
COP/EER	W/W	3.93	3.78	3.84	3.84	3.84	3.32	3.32	2.87
	Btu/hW	13.41	12.97	12.55	13.12	13.12	11.35	11.35	9.80
SEER	Btu/hW	20.85	21.29	19.96	19.79	19.89	19.04	19.28	18.53
Indoor Unit									
Air Volume	m³/min	14.0	21.0	36.0	36.0	36.0	36.0	36.0	36.0
	cfm	495	740	1,270	1,270	1,270	1,270	1,270	1,270
External Static Pressure [Min-Max]	Pa	30 (10-150)	30 (10-150)	50 (10-150)	50 (10-150)	50 (10-150)	50 (10-150)	50 (10-150)	50 (10-150)
Sound Pressure Level [Hi/L0]	dB [A]	32 / 27	35 / 29	40 / 30	40 / 30	40 / 30	40 / 30	40 / 30	40 / 30
Sound Power Level [Hi/L0]	dB [A]	55 / 50	58 / 52	63 / 53	63 / 53	63 / 53	63 / 53	63 / 53	63 / 53
Dimension	Indoor (HxWxD)	mm	250 x 800 x 730	250 x 1,000 x 730	250 x 1,400 x 730	250 x 1,400 x 730	250 x 1,400 x 730	250 x 1,400 x 730	250 x 1,400 x 730
Net Weight		kg	25	30	39	39	39	39	39
Outdoor Unit									
Sound Pressure Level	dB [A]	50	53	53	54	54	57	57	58
Sound Power Level	dB [A]	69	72	72	73	73	76	76	77
Dimension	Outdoor (HxWxD)	mm	695 x 875 x 320	695 x 875 x 320	695 x 875 x 320	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370
Net Weight		kg	39	39	39	67	67	75	73
Piping Connection	Gas Pipe	mm (inch)	12.70 (1/2)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)
	Liquid Pipe	mm (inch)	6.35 (1/4)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)
Pipe Length	Min-Max	m	5-50	5-50	5-50	5-50	5-50	5-50	5-50
Elevation Difference	m	30	30	30	30	30	30	30	30
Maximum Chargeless Length Max	m	30	30	30	30	30	30	30	30
Additional Gas	g/m	15	25	25	25	25	25	25	25
Operation Range, Outdoor	Min-Max	°C	16-52	16-52	16-52	16-52	16-52	16-52	16-52